

CALIPER SPECIFICATIONS


ZR49 Series Caliper - Rear

Monobloc - 4 Piston - 2 Pad


ZR49

Common Application: Various


Application	Short Track Rear	Short Track Rear	Short Track Rear
Mount Dim. (mm)	180 x 42	180 x 42	180 x 42
Piston sizes (mm)	25.5/29.0	290/32.0	29.0/36.5
Piston area per side (mm ²)	1171.22	1464.77	1706.86
Max disc dia (mm)	323	323	323
Max disc thickness (mm)	32	32	32
Min disc thickness (mm)	28	28	28
Max pad thickness (mm)	29	29	29
Fluid capacity (cm ³)	27.5	34.4	40.1
Max operating pressure	103bar/1500psi	103bar/1500psi	103bar/1500psi
Pad shape	7823	7823	7823
Pad area per side (cm ²)	57.05	57.05	57.05
Caliper weight	2.39kg/5.3lbs	2.39kg/5.3lbs	2.39kg/5.3lbs
Handing	Caliper Part #	Caliper Part #	Caliper Part #
Leading Left	49.323.255.290.01	49.323.290.320.01	49.323.290.365.01
Leading Right	49.323.255.290.01	49.323.290.320.02	49.323.290.365.02

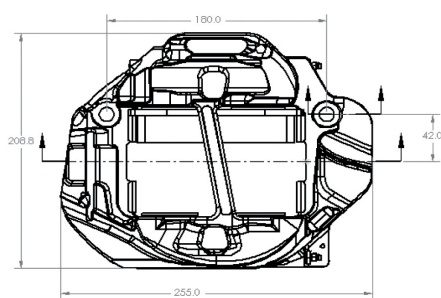

41 Series Caliper				
Rotor OD (mm)	Pad Shape	Eff Radius (mm)	H Dim (mm)	PL Dim (mm)
323.0	7941	141.0	110.1	51.4



Pad Shape

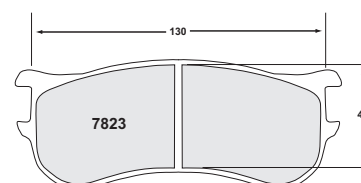

See Pad comparison chart for thickness options and compound availability

